

MX-A6012-ME V2 Router/AP/Gateway WiFi6 Wireless Access Point

Features

- Qualcomm® Atheros IPQ6000 quad-core ARM 64-bit A53 1.2GHz processor
- 2x2 2.4GHz radios with up to 573Mbps physical data rate
- 2x2 5.8GHz radios with up to 1201Mbps physical data rate
- Support Dynamic Frequency Selection (DFS)
- DDR3 memory up to 3 GB
- Up to 256MB (32MB) of SPI or Flash
- Up to 256MB of NAND Flash
- Support Uart/GPIO/LED
- WAN connector: 1*100Mbps (GH1.25mm 6P with lock)
- LAN connector: 1*100/1000Mbps (GH1.25mm 8P with lock)
- DC power supply: DC12/2A (GH1.25mm 4P with lock)



Description

MX-A6012-ME V2 Router/AP/Gateway WiFi6 Wireless Access Point is a complete solution for 802.11 g/gn/an/ac/ax Wi-Fi6, it's optimized for low power, low cost and highly integrated AP.

Based on the single-chip IPQ6000, the product integrates a quad-core ARM Cortex-A53 1.2GHz CPU and dual-band 802.11 g/gn/an/ac/ax 2x2 MIMO MAC/BB/radio with external FEM. It supports 802.11 ax operation, up to 1700 Mbps for 80MHz.

Recommended Operating Ratings

OBJECT	MINIMUM	STANDARD	MAXIMUM	UNIT
OPERATING TEMPERATURE	-20	25	70	°C
	-4	77	158	°F
VDD 12V	11.8	12	12.2	V
VDDIO	1.6	1.8 or 3.3	3.6	V

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

DC characteristics

OBJECT	MINIMUM	STANDARD	MAXIMUM	UNIT
SPARE ITEMS	-	15	-	mA
TX CURRENT (4 CHAINS)	-	950	-	mA
RECEIVE CURRENT (4 CHAINS)	-	250	-	mA

Environmental Requirements

OPERATING TEMPERATURE	-20℃ ~ 55℃ / -4~131°F
STORAGE TEMPERATURE	-40℃ ~ 85℃ / -40~185°F
OPERATING HUMIDITY	5% ~ 95%
STORAGE HUMIDITY	5% ~ 95%

VESD

HUMAN BODY MODEL	-2000V ~ +2000V
MACHINE MODE	-200V ~ +200V

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Radio Frequency Parameters (2GHz)

	RATE	TRANSMIT POWER (PER CHAIN)	TRANSMIT POWER (DUAL CHAIN)	TOLERANCE	RECEIVE SENSITIVITY	TOLERANCE
2GHz 802.11b	1Mbps	20dBm	23dBm	±2dB	-101dBm	±2dB
	2Mbps	20dBm	23dBm	±2dB	-99dBm	±2dB
	5.5Mbps	20dBm	23dBm	±2dB	-97dBm	±2dB
	11Mbps	20dBm	23dBm	±2dB	-94dBm	±2dB
2GHz 802.11g	6Mbps	20dBm	23dBm	±2dB	-97dBm	±2dB
	9Mbps	20dBm	23dBm	±2dB	-95dBm	±2dB
	12Mbps	20dBm	23dBm	±2dB	-92dBm	±2dB
	18Mbps	20dBm	23dBm	±2dB	-90dBm	±2dB
	24Mbps	20dBm	23dBm	±2dB	-87dBm	±2dB
	36Mbps	20dBm	23dBm	±2dB	-85dBm	±2dB
	48Mbps	20dBm	23dBm	±2dB	-83dBm	±2dB
	54Mbps	20dBm	23dBm	±2dB	-81dBm	±2dB
2GHz 802.11n HT20	MCS 0	20dBm	23dBm	±2dB	-96dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-94dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-86dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-80dBm	±2dB
2GHz 802.11n HT40	MCS 0	20dBm	23dBm	±2dB	-94dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-86dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-77dBm	±2dB

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Radio Frequency Parameters (2GHz)

	RATE	TRANSMIT POWER (PER CHAIN)	TRANSMIT POWER (DUAL CHAIN)	TOLERANCE	RECEIVE SENSITIVITY	TOLERANCE
2GHz 802.11ax HE20	MCS 0	20dBm	23dBm	±2dB	-97dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-95dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-84dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-81dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-78dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-75dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-72dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB	-69dBm	±2dB
	MCS 11	15dBm	18dBm	±2dB	-66dBm	±2dB
2GHz 802.11ax HE40	MCS 0	20dBm	23dBm	±2dB	-95dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-93dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-84dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-81dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-78dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-75dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-72dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-69dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB	-66dBm	±2dB
	MCS 11	15dBm	18dBm	±2dB	-64dBm	±2dB

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Radio Frequency Parameters (5GHz)

	RATE	TRANSMIT POWER (PER CHAIN)	TRANSMIT POWER (DUAL CHAIN)	TOLERANCE	RECEIVE SENSITIVITY	TOLERANCE
5GHz 802.11a	6Mbps	20dBm	23dBm	±2dB	-94dBm	±2dB
	9Mbps	20dBm	23dBm	±2dB	-92dBm	±2dB
	12Mbps	20dBm	23dBm	±2dB	-89dBm	±2dB
	18Mbps	20dBm	23dBm	±2dB	-87dBm	±2dB
	24Mbps	20dBm	23dBm	±2dB	-85dBm	±2dB
	36Mbps	20dBm	23dBm	±2dB	-83dBm	±2dB
	48Mbps	20dBm	23dBm	±2dB	-80dBm	±2dB
	54Mbps	20dBm	23dBm	±2dB	-78dBm	±2dB
5GHz 802.11n/ac VHT20	MCS 0	20dBm	23dBm	±2dB	-94dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-77dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-75dBm	±2dB
5GHz 802.11n/ac VHT40	MCS 0	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-90dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-88dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-82dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-76dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-73dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-70dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-67dBm	±2dB

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Radio Frequency Parameters (5GHz)

	RATE	TRANSMIT POWER (PER CHAIN)	TRANSMIT POWER (DUAL CHAIN)	TOLERANCE	RECEIVE SENSITIVITY	TOLERANCE
5GHz 802.11ac VHT80	MCS 0	20dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-78dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-75dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-73dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-70dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-67dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-64dBm	±2dB
5GHz 802.11ax HET20	MCS 0	20dBm	23dBm	±2dB	-94dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-92dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-86dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-80dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-77dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-74dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-71dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-68dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB	-65dBm	±2dB
	MCS 11	15dBm	18dBm	±2dB	-62dBm	±2dB

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Radio Frequency Parameters (5GHz)

	RATE	TRANSMIT POWER (PER CHAIN)	TRANSMIT POWER (DUAL CHAIN)	TOLERANCE	RECEIVE SENSITIVITY	TOLERANCE
5GHz 802.11ax HE40	MCS 0	20dBm	23dBm	±2dB	-89dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-87dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-85dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-83dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-81dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-78dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-75dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-72dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-69dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-66dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB	-63dBm	±2dB
	MCS 11	15dBm	18dBm	±2dB	-60dBm	±2dB
5GHz 802.11ax HE80	MCS 0	20dBm	23dBm	±2dB	-86dBm	±2dB
	MCS 1	20dBm	23dBm	±2dB	-84dBm	±2dB
	MCS 2	20dBm	23dBm	±2dB	-81dBm	±2dB
	MCS 3	20dBm	23dBm	±2dB	-79dBm	±2dB
	MCS 4	20dBm	23dBm	±2dB	-76dBm	±2dB
	MCS 5	20dBm	23dBm	±2dB	-74dBm	±2dB
	MCS 6	20dBm	23dBm	±2dB	-71dBm	±2dB
	MCS 7	19dBm	22dBm	±2dB	-68dBm	±2dB
	MCS 8	18dBm	21dBm	±2dB	-65dBm	±2dB
	MCS 9	18dBm	21dBm	±2dB	-62dBm	±2dB
	MCS 10	16dBm	19dBm	±2dB	-59dBm	±2dB
	MCS 11	15dBm	18dBm	±2dB	-56dBm	±2dB

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932


WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com

Nanjing MAXON O.E. TECH. CO., LTD

Add: 6/F, Building A3, Zidong International Creative Park, Zidong Road, Qixia District, Nanjing, China.

Dimension

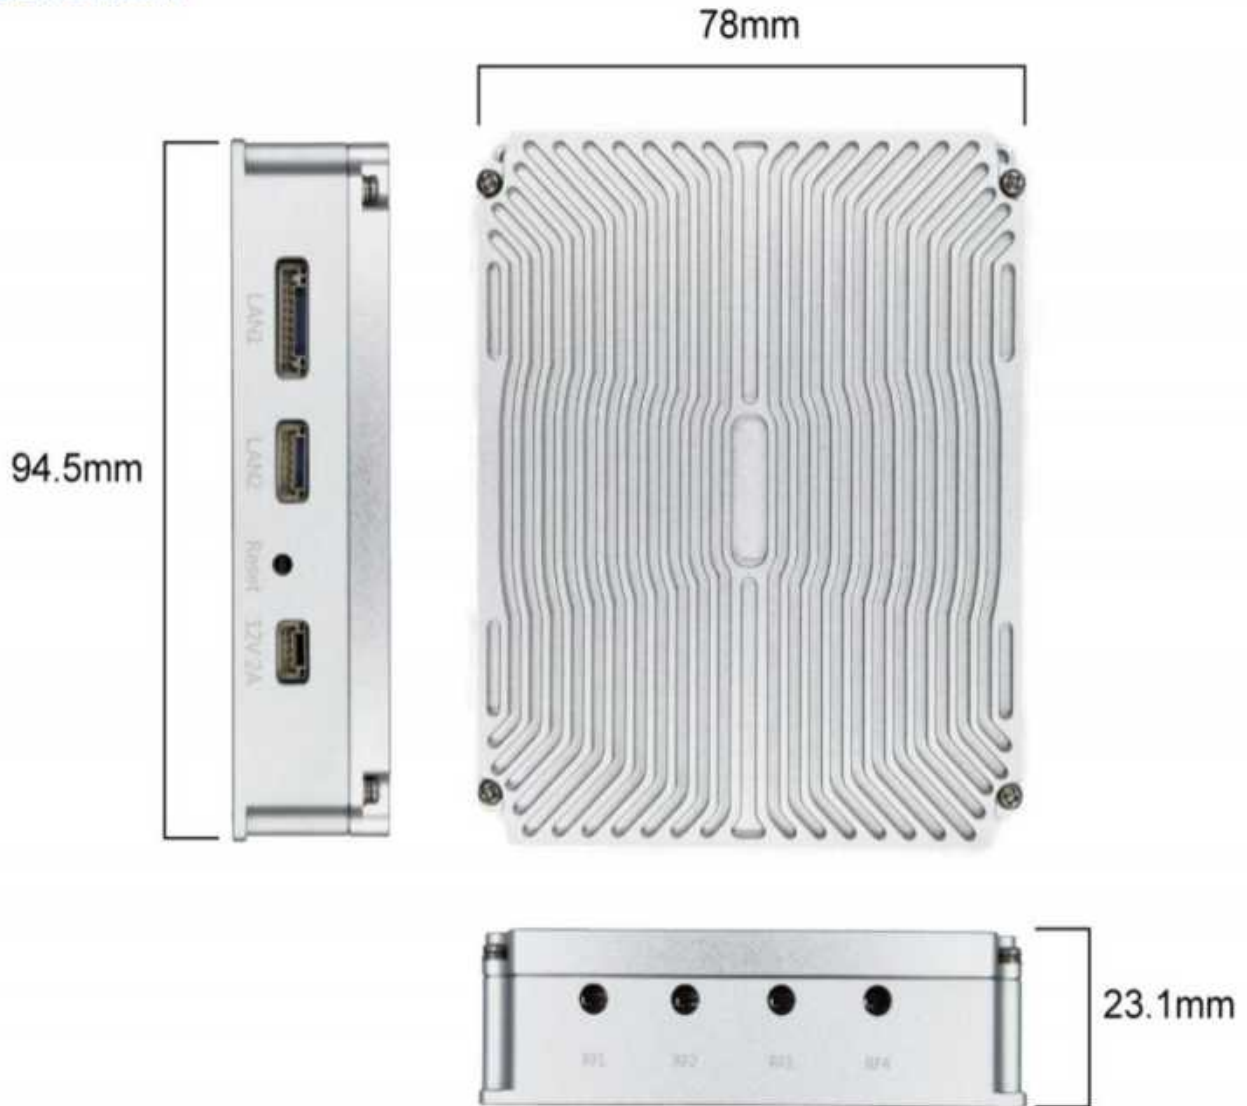

MAXON

Link Of Your Think

Nanjing MAXON O.E. TECH. CO., LTD

TEL: 86-25-86380932

WEB: www.mxcomm.cn

E-MAIL: info@maxonc.com